

Metering Pumps

PRIUS

Flow rate up to 508 l/h, working pressure up to 10 bar




PRIUS P

Motor driven plunger metering pump

- Ceramic and SS plungers
- SS and PP pump heads
- Stroke length adjustment
- Single and three phase motors
- 0.18, 0.37 and 0.55 kW motors sizes
- 50 and 60 Hz motors


PRIUS P - PUMP HEADS



PP

AISI316L

PRIUS P - PLUNGERS



CERAMIC (SIALOX96)


AISI420

WITH PP PUMP HEAD AND CERAMIC PLUNGER
WITH SS PUMP HEAD AND PLUNGER

FEATURES

- 3-phase motor
- Ceramic plunger / Stainless steel (AISI316) plunger
- Aluminium enclosure
- Stroke adjustment

PUMP HEADS

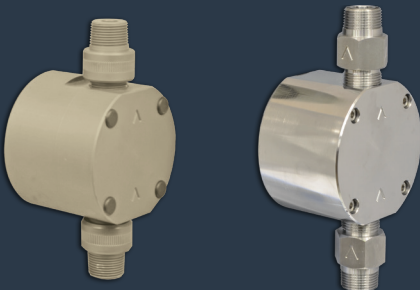

PP

AISI 316L

PLUNGERS



CERAMIC
(SIALOX96)

AISI 420

LENGTH PLUNGER	50Hz	SPM	Pressure		Capacity		Motor	HOSES CONNECTION		
			bar	psi	l/h	gph		PP	SS	
15 mm	14	010024	175	10	145	24	6,3	0,18 kW	G1/2" 12x18	R1/2"
		010013	94			13	3,4			
		010010	70			10	2,6			
		010005	35			5	1,3			
	25	010080	175	10	145	80	21,1	0,18 kW	G1/2" 12x18	R1/2"
		010043	94			43	11,4			
		010032	70			32	8,5			
		010016	35			16	4,2			
	32	010130	175	10	145	130	34,3	0,18 kW	G1/2" 12x18	R1/2"
		010070	94			70	18,5			
		010052	70			52	13,7			
		010026	35			26	6,9			
40	010210	175	10	145	210	55,5	0,37 kW	G3/4" i.d. 18 mm	R3/4"	
	010113	94			113	29,8				
	010084	70			84	22,2				
	010042	35			42	11,1				
50	010320	175	10	145	320	84,5	0,37 kW	G3/4" i.d. 18 mm	R3/4"	
	010172	94			172	45,4				
	010128	70			128	33,8				
	010064	35			64	16,9				
63	007508	175	7	101,5	508	35	0,55 kW	/	R1"	
	007273	94			273	35				
	007203	70			203	35				
	007101	35			101	26,7				